

**! IMPORTANT:**

Before the Sargent Seat can be installed, the front seat OEM latching bracket must be transferred to the Sargent Seat.

**YAMAHA TRACER 900/900GT 2019+ SEAT INSTALLATION INSTRUCTIONS**




**Tools Required:** 10mm Socket or Wrench

**INSTALLATION**

**Front Seat:**

1. Transfer the front seat OEM latching bracket to the Sargent Seat as indicated on the right.
2. Install your new Sargent seat the same way you would your OEM seat in the desired seat height per your OEM user's manual using the following steps:
  - a. Place the OEM HI/LOW plastic adjuster bracket in the appropriate position.
  - b. Carefully align and guide front seat tongue into the appropriate front receiver. See illustration.
  - c. Make final adjustments aligning the registration tab to the proper receiver on the frame.
  - d. Push down to engage.

**NOTE:** It is normal for the front seat to press slightly on the OEM under seat body work in the low position. As an option, this body work may be trimmed slightly (2-3 mm) to alleviate this conflict.

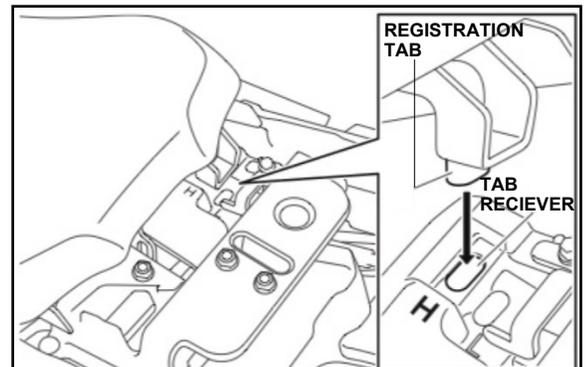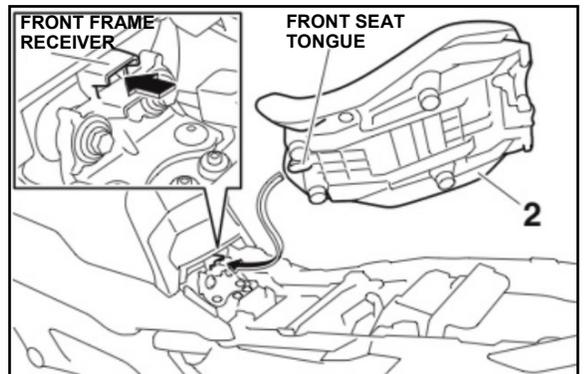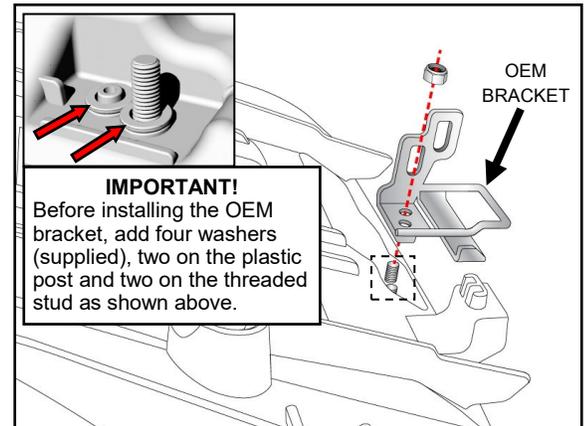


**Rear Seat:**

Maneuver the seat down and back to engage rear tabs on motorcycle. Once you are sure that the rear tongues and tabs are properly engaged, push down on front of rear seat to engage lock. FOR INFORMATION ON REAR SEAT INSTALLATION, SEE OUR VIDEO AT <https://youtu.be/WTRXrs2IMbY>

**HELPFUL HINT:**

Carefully maneuver the seat into place by first being sure to clear the under seat body work. NOTE: this may take a little patience and it may help to spread the body work using your hands to achieve clearance. Once in place, moderate backward force may be required to align the latch before pushing down to engage.

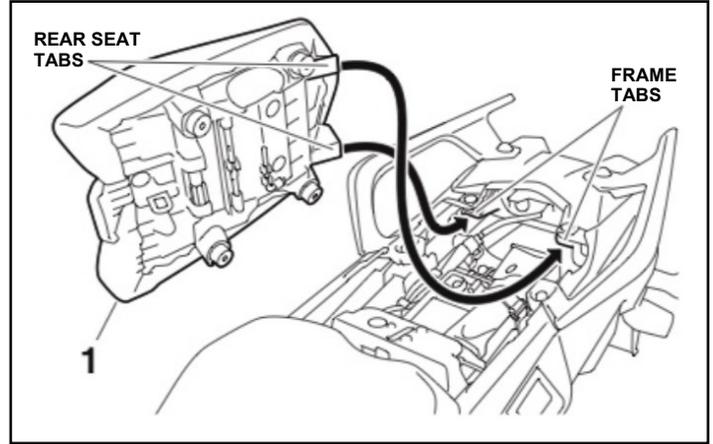

**! IMPORTANT:**

The seat tabs MUST be UNDER the frame tabs on the motorcycle. Once engaged, verify this by tugging up on the back of the rear seat.