

2003-2005 YAMAHA FJR BACKREST INSTALLATION GUIDE

IMPORTANT

Read ALL instructions thoroughly prior to installation and use.

Periodically inspect all bolts, connection points, and support bracket verifying that all connections remain secure and there are no signs of damage or wear. If problems are noted, discontinue use and contact the manufacturer immediately.

WARNING

This backrest is NOT designed to withstand pressures associated with rapid acceleration. Passengers should always maintain secure hold to driver or use rear grab handles under such conditions. Failure to do so could result in property damage, serious personal injury or death.

DISCLAIMER

Motorcycling is a dangerous activity that can result in serious injury or death. Please be advised that this product has NOT been tested under every conceivable condition. While every effort has been made to design a sturdy and reliable product, numerous unpredictable conditions and/or variables could occur during its use, resulting in possible property damage, personal injury or death.

By proceeding with the installation and use of this product you are waiving all legal recourse/ rights in the event of any property damage, personal injury or death contributed to by its use, and in no case will Sargent Cycle Products N.A. be held liable. If you do not agree to all terms of this disclaimer, you may return the product in its original packaging for a full refund of the purchase price (excluding shipping and handling).

Tools Required

6mm hex wrench
13mm wrench

Installation



Remove the 2 bolts in the tail section bulkhead from the cycle luggage rack. Position the mounting support bar against the bulk head. Install the center bolt.

Run both stock screws in.

Tighten all 3 bolts and check your installation for proper fit.

Now you can re-mount your seat, insert the backrest, and enjoy!

Once in use, you should periodically inspect all bolts to insure none have come loose.

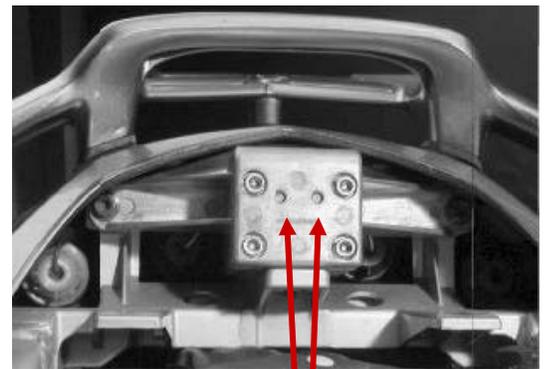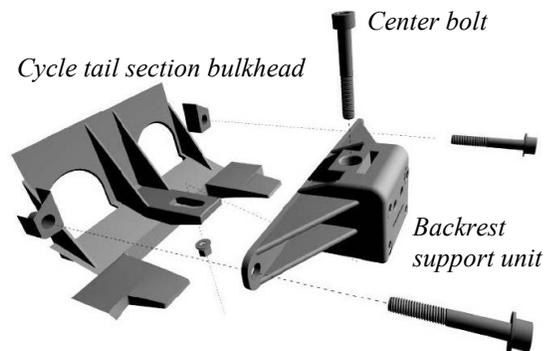

Factory set screws, do not adjust.